



IntelliFlow-320

Overview


The NIKSUN® IntelliFlow-320 consists of 1U high density, high performance, packet broker.

The IntelliFlow-320 includes up to 32 ports of 10G/25G/40G/100G. IntelliFlow-320 is a network aggregator that is designed for use in both top-of-rack applications or at the network edge. It can be used to optimize port utilization of existing infrastructure or as a stand-alone device in L2-L4 Filtering applications.

It is compatible with multi-source agreement (MSA) compliant pluggable network devices including QSFP, QSFP28, and transceivers. It offers flexible port speeds (port splitting) that can scale according to network needs (10G/25G/40G/100G) and can be changed within the interface.

NIKSUN's Common Use Case

The diagram below represents NIKSUN's common use case, wherein the IntelliFlow-320 can be used for efficient aggregation, replication, filtering, and load balancing of traffic.

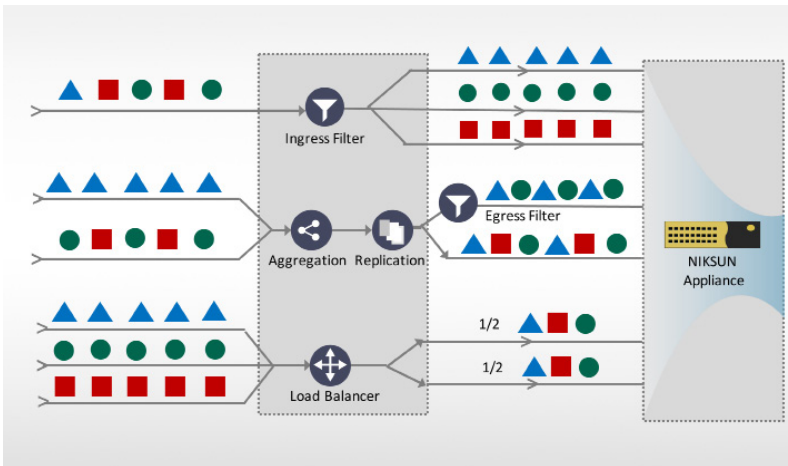

Features of IntelliFlow-320



Management

- » User friendly, web based interface
- » Supports TACACS+, RADIUS, SNMP, and NTP

Fabric Flow

Mapping traffic flow relationships between source and destination ports:

- » Aggregate traffic to single port
- » Replicate traffic to multiple ports
- » Tunnel handling – GTP filtering, GRE termination, MPLS filtering and stripping, VXLAN filtering and stripping
- » Flexible load balancing regimes
- » Ingress and Egress filters

IntelliFlow-320 Hardware Specifications	
Solution Dimensions	
Dimension	Height: 1.75" (43.0 mm) Width: 17.3" (440.0 mm) Depth: 16" (432.0 mm)
Weight	19.5 lbs (8.85 kg)
Power Delivery	
Max Power Consumption	337.36 W
Power Dissipation	1151.07 BTU/hour
AC	100V- 240V, 50/60Hz
DC	48 - 60V, 19 - 14 Amp
Operating Environment	
Temperature	32°F – 122°F (0°C – 45°C)
Humidity	20% ~ 80%
Altitude	80000 Ft

IntelliFlow-320 Compliance Regulations

Safety: UL/CSA 60950-1, EN 60950-1, IEC 60950-1, CB Scheme with all country differences
Electromagnetic Emissions: FCC Part 15B, ICES 003, EN55032
Immunity: EN55024
Certificates: North America (NRTL), European Union (EU), VCCI (Japan), 2014/35/EU Low Voltage Directive, 2014/30/EU EMC Directive, 2011/65/EU RoHS Directive, 2012/19/EU WEEE Directive

457 North Harrison Street
 Princeton
 NJ 08540
 USA
 t: +1.609.936.9999
 toll free: +1.888.504.3336
 f: +1.609.419.4260
 e: info@niksun.com
 www.niksun.com



About NIKSUN: NIKSUN is the recognized worldwide leader in making the Unknown Known. The company develops a highly scalable array of real time and forensics-based cyber security and network performance management solutions for large enterprises, government & intelligence agencies, service providers, financial services companies and retailers. NIKSUN's award-winning appliances deliver unprecedented flexibility and packet capture power. The company's patented real-time analysis and recording technology is the industry's most comprehensive solution for secure and reliable network infrastructure and services. NIKSUN, headquartered in Princeton, New Jersey, has sales offices and distributors throughout the US, Europe, the Mid East and Asia-Pacific. For more information, please visit www.niksun.com.

NIKSUN, NetDetector and NetVCR are either registered trademarks or trademarks of NIKSUN, Inc. in the United States and/or other countries. Other product and company names mentioned herein may be the trademarks of their respective owners. NIKSUN, Inc. shall not be liable for damages of any kind for use of this information. Copyright© 2024 NIKSUN, Inc. All rights reserved. NK-DS-IntellIF-2401-1.0